


hoopik L1200

MUCH MORE THAN A GARLAND...

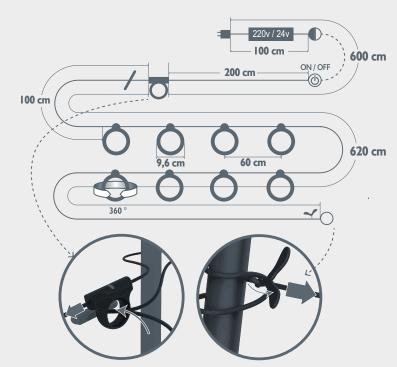

HOOPIK L1200 is a fully fledged **aerial lighting solution**.

It consists of a 12-metre matt black cable, including a 6-metre hanging cable, plus 8 LED spotlights that are adjustable through 360° and 2 hook mechanisms, one at each end.

The dimmer switch, which is easy to access once installed, means it's equally suited to both a muted lounge area and a large, brightly lit table.

What's more, it's equipped with Bluetooth technology and can be controlled remotely with the Fermob Lighting app or the Ludo connected outdoor switch.





HOOPIK

3501 - STRING LIGHTS L. 1200 CM - TYPE E & F

Bluetooth

DESIGN BY J.MAZOYER-DO











Polycarbonate diffuser

ABS frame

Technology: integrated LED - Luminous flux: 960 lm

Switch type: touch-activated dimmer

Function of the switch: ON/OFF (short click, 1s), brightness variation

Lighting mood:

Position I warm white (3000°K) dimmer switch (10 to 100%) Type of power supply: mains - Plug type: Plug type E & F (EU

countries excluding UK)

Lighting cable: 6.20 metres (8 rings) + 6-metres main cable

0.24 A - 230 V - 25 W | IP54 | IK 6 | CE

Energy rating: F

Powered by Smart & Green

Compatible with:

FERMOB LIGHTING APPLICATION - FERMOB LIGHTING


SMART SWITCH - LUDO

350121 350182

Acapulco Blue Cactus

3501B9

Black Cherry



2.20 kg

3503 - STRING LIGHTS LI 200 CM - TYPE J

Bluetooth

DESIGN BY J.MAZOYER-DO











Polycarbonate diffuser

ABS frame

Technology: integrated LED - Luminous flux: 960 lm

Switch type: touch-activated dimmer

Function of the switch: ON/OFF (short click, 1s), brightness variation

Lighting mood:

Position I warm white (3000°K) dimmer switch (10 to 100%)

Type of power supply: mains - Plug type : Plug type J (Switzerland,

Liechtenstein)

Lighting cable: 6.20 metres (8 rings) + 6-metres main cable

0.24 A - 230 V - 25 W | IP54 | IK 6 | CE

Energy rating: F

Powered by Smart & Green

Compatible with:


FERMOB LIGHTING APPLICATION - FERMOB LIGHTING

SMART SWITCH - LUDO

350321 350320

Acapulco Blue Red Ochre

350382 3503B9 Cactus Black Cherry



2,20 kg



HOOPIK

3510 - LAMP Ø24 CM DESIGN BY J.MAZOYER-DO







0,80 kg







Polycarbonate diffuser Aluminium frame

ABS Base

Technology: integrated LED - Luminous flux: 200 lm

Switch type: touch-activated dimmer

Function of the switch: change the brightness (10 to 100%, click 4 s), change the light temperature (double short click), ON/OFF (short click, 1s) Lighting mood:

Position I warm white (2700°K) dimmer switch (10 to 100%) Position 2 neutral white (4000°K) dimmer switch (10 to 100%) Type of power supply: battery - Min. Battery life (100%): 8 h

Battery use cycle: 300 cycle

Recharge time: 5h - Type of recharge: USB Fermob magnet - 1.5 m cable (provided)

Bypass to prevent battery damage during wired use

2 A - 5 V - 10 W - IP42 | IK 10 | CE | FCC | UKCA

Energy rating: F

Powered by Smart & Green







3510C7 351042









HOOPIK

3510 - LAMP Ø24 CM DESIGN BY J.MAZOYER-DO









0,80 kg







Polycarbonate diffuser Aluminium frame

ABS Base

Technology: integrated LED - Luminous flux: 200 lm

Switch type: touch-activated dimmer

Function of the switch: change the brightness (10 to 100%, click 4 s), change the light temperature (double short click), ON/OFF (short click, 1s) Lighting mood:



Battery use cycle: 300 cycle

Recharge time: 5h - Type of recharge: USB Fermob magnet - 1.5 m cable (provided)

Bypass to prevent battery damage during wired use

2 A - 5 V - 10 W - IP42 | IK 10 | CE | FCC | UKCA

Energy rating: F

Powered by Smart & Green







3510C7 351042









SPARE PARTS FOR LIGHTING



355000 - POWER SUPPLY FOR STRING LIGHTS L. 1200 CM



Compatible with:

STRING LIGHTS L1200 CM – TYPE E & F - HOOPIK STRING LIGHTS L1200 CM – TYPE J - HOOP IK STRING LIGHTS L1200 CM - TYPE I - HOOPIK

355000 Black

539000 - FERMOB MAGNET CABLE



Compatible with:
LAMP H.41 MAX - MOOON!
LAMP H.27 CM - OTO
LAMP Ø24 CM - HOOPIK
LAMP H.20 CM - SWIING

