


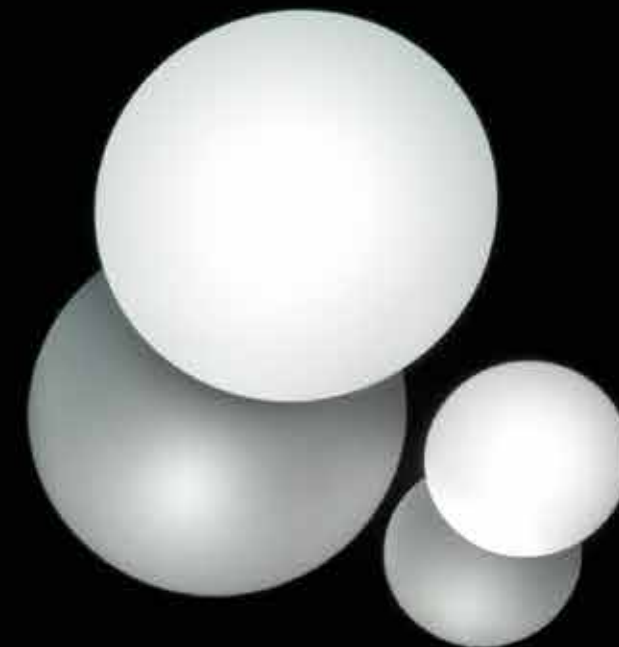

Sole

design **Lyxo Design Team**
technical data p. 192

Luminous Sphere

Tante sono le dimensioni e i colori delle sfere luminose che sanno creare suggestivi effetti scenografici.

Materiale: Polietilene
Versioni luminose: 2

There are many sizes and colors of the luminous spheres that can create suggestive scenographic effects.

Material: Polyethylene
Luminous versions: 2



Sole
design
Lyxo Design Team

pg. 130

Luminous Spheres

Light: wire white led inox base
Light: battery RGBW led

Code: SL307-0200X1
Dimensions: ø 20 cm
Material: polyethylene

Code: SL307-0400X1
Dimensions: ø 40 cm
Material: polyethylene

Code: SL307-0600X1
Dimensions: ø 60 cm
Material: polyethylene

Code: SL307-0800X1
Dimensions: ø 80 cm
Material: polyethylene

Wire white led inox base from ø 40 to ø 80 / Con Cavo *

E27 1x8-14-15W LED 240V 6.500°K
Ring and Stake supplied / Anello e picchetto inclusi

IP65 **PLUG/**
SPINA IP44

Induction battery RGBW led from ø 20 to ø 80 (for water use)

With remote control / Con telecomando 110/220V

IP68 **PLUG/**
SPINA IP20

Rechargeable battery RGBW led from ø 40 to ø 80

With remote control / Con telecomando 110/220V

IP65 **PLUG/**
SPINA IP20

* Spheres Accessories


Hanging Ring

for wire white led
inox base spheres
from ø 40 to ø 80



Ground Anchor Stake

for wire white led
inox base spheres
from ø 40 to ø 80



SOLE

SFERA LUMINOSA

COD. SL307



Sfera Luminosa Sole / Sole Luminous Sphere / Sphère Lumineuse / Esfera luminosa
Materiale: Polietilene / Polyethylene / Polyéthylène / Polietilene

Wire white led inox base from ø 40 to ø 80 / Con Cavo*

Cod. 019CA02

E27 1x8-14-15W LED 240V 6.500°K

Ring an Stake supplied / Anello e picchetto inclusi


IP65 PLUG/
SPINA IP44

Induction battery RGBW led from ø 20 to ø 80

Cod. ø 20 019CA14 / Cod. from ø 40 to ø 80 019CA01

With remote control / Con telecomando 110/220V

IP68 PLUG/
SPINA IP20

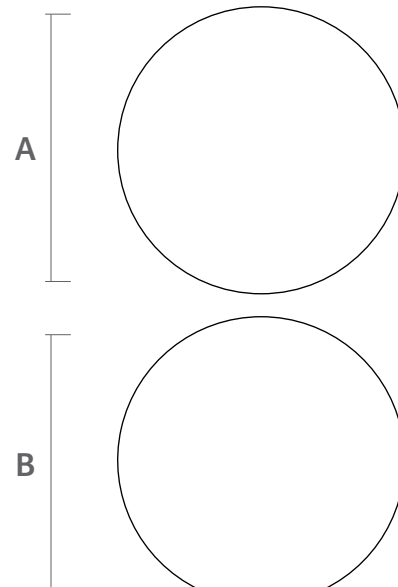

COD.	A	B	Kg	Kg	m3
SL307-0200X1	20	18	0,5	0,78	0,01
SL307-0400X1	40	38	2	2,98	0,06
SL307-0600X1	60	56	3,6	5,82	0,24
SL307-0800X1	80	75	6,4	9,78	0,55

COD.	in/out	anti UV					
SL307-0200X1	in/out	X	-65° +85°	X	X	PE	X
SL307-0400X1	in/out	X	-65° +85°	X	X	PE	X
SL307-0600X1	in/out	X	-65° +85°	X	X	PE	X
SL307-0800X1	in/out	X	-65° +85°	X	X	PE	X